



1N4148WS

Reverse Voltage 100 Volts Forward Current - 0.15 Ampere

FAST SWITCHING DIODES

Features

- ◆ Fast switching speed
- ◆ Surface mount package ideally suited
- ◆ for automatic insertion
- ◆ For general purpose switching applications
- ◆ High conductance

Mechanical Data

Case : JEDEC SOD-323 molded plastic body


Terminals : Plated leads solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbols marked on case

Weight : 0.0007 ounce, 0.02 grams

Marking: T4

SOD-323

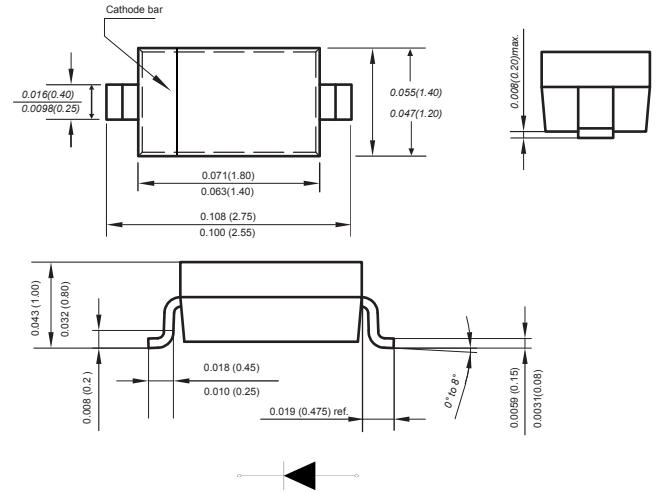

Dimensions in inches and (millimeters)

PARAMETER	SYMBOLS	1N4148WS	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	100	V
Maximum RMS voltage	V_{RMS}	75	
Reverse Breakdown voltage at $I_R=1 \mu A$	$V_{(BR)R}$	75	
Forward continuous current	I_{FM}	300	mA
Average rectified output current	I_O	150	mA
Peak forward current at 1s at 1ms at 1us	I_{FSM}	0.5 1 4.0	A
Power dissipation	P_d	400	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	250	°C/W
Junction temperature	T_j	-55 to +150	°C
Storage temperature	T_{STG}	-55 to +150	°C

Characteristics at $T_a=25^\circ C$

PARAMETER	SYMBOLS	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V_{F1}			0.715	V	$I_F=1.0mA$
	V_{F2}			0.855	V	$I_F=10mA$
	V_{F3}			1.0	V	$I_F=50mA$
	V_{F4}			1.25	V	$I_F=150mA$
Reverse current	I_{R1}			0.025	μA	at $V_R=20V$ $T_j=25^\circ C$
	I_{R2}			1	μA	at $V_R=75V$ $T_j=25^\circ C$
	I_{R3}			30	μA	at $V_R=25V$ $T_j=150^\circ C$
	I_{R4}			50	μA	at $V_R=75V$ $T_j=150^\circ C$
Capacitance between terminals	C_T			2	pF	$V_R=0V, f=1.0MHz$
Reverse recovery time	t_{rr}			4	ns	$I_F=I_R=10mA$ $I_{rr}=0.1I_R, R_L=100 \Omega$



1N4148WS

Reverse Voltage 100 Volts Forward Current - 0.15 Ampere

Typical Characterisitics

Fig.1 Power Derating Curve

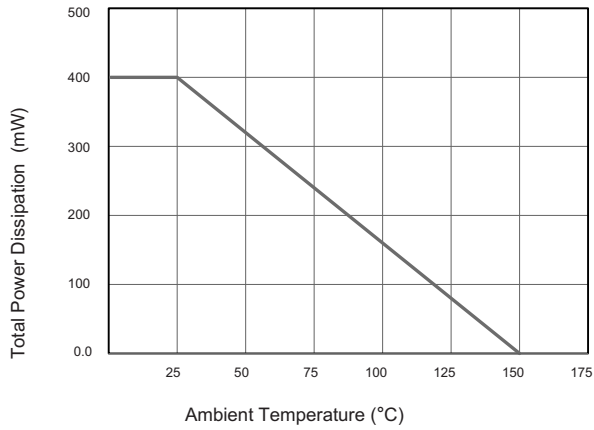


Fig.2 Typical Reverse Characteristics

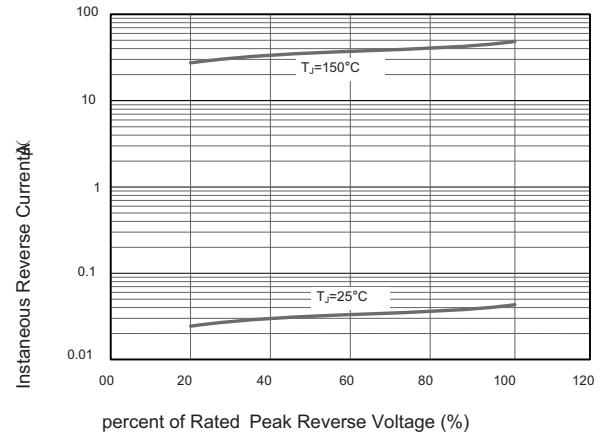


Fig.3 Typical Instaneous Forward Characteristics


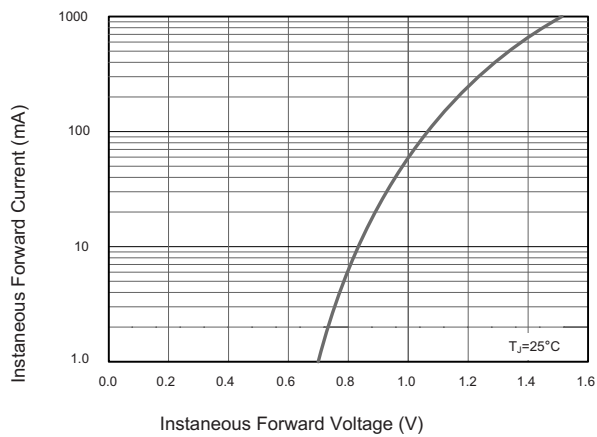


Fig.4 Typical Junction Capacitance




The curve above is for reference only.

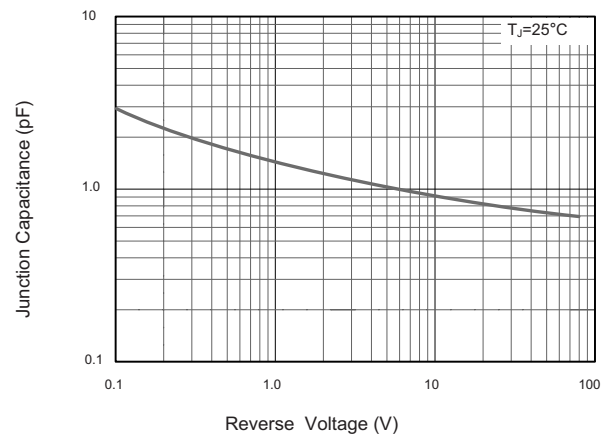

1N4148WS

Reverse Voltage 100 Volts Forward Current - 0.15 Ampere

Packing information

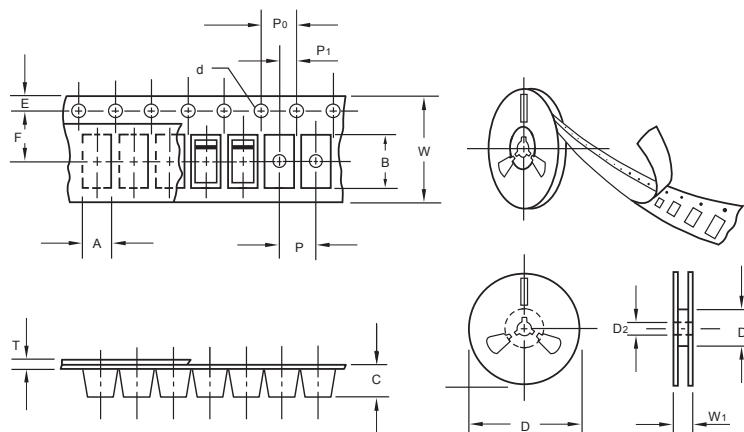

unit:mm


Item	Symbol	Tolerance	SOD-323
Carrier width	A	0.1	2.1
Carrier length	B	0.1	4.0
Carrier depth	C	0.1	1.60
Sprocket hole	d	0.05	1.55
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	50.0
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.25
Tape width	W	0.3	8.15
Reel width	W1	1.0	10.5

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-323	7"	3,000	4.0	45,000	210*208*203	178	430*430*235	180,000	

Suggested Pad Layout

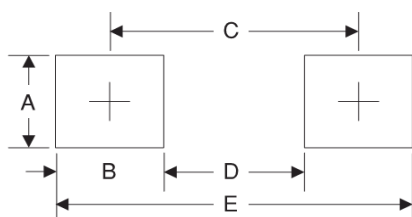

Symbol	Unit (mm)	Unit (inch)
A	0.7	0.028
B	0.7	0.028
C	2.15	0.085
D	1.8	0.071
E	2.85	0.112