



SS12 THRU SS1200

Reverse Voltage - 20 to 200 Volts Forward Current - 1.0 Ampere


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
250 °C/10 seconds at terminals

Mechanical Data

Case : JEDEC DO-214AC/SMA molded plastic body
Terminals : Solderable per MIL-STD-750, Method 2026
Polarity : Color band denotes cathode end Mounting
Position : Any
Weight : 0.002 ounce, 0.07 grams

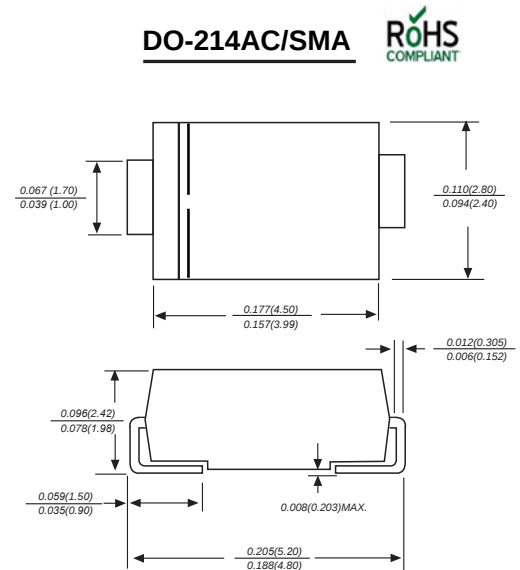

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD SS12	MDD SS13	MDD SS14	MDD SS15	MDD SS16	MDD SS18	MDD SS110	MDD SS1150	MDD SS1200	UNITS		
Marking Code													
Maximum repetitive peak reverse voltage		V _{RRM}	20	30	40	50	60	80	100	150		200	V
Maximum RMS voltage		V _{RMS}	14	21	28	35	42	56	70	105		140	V
Maximum DC blocking voltage		V _{DC}	20	30	40	50	60	80	100	150		200	V
Maximum average forward rectified current	I <sub(av)< sub=""></sub(av)<>	1.0									A		
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	25									A		
Maximum instantaneous forward voltage at 1.0A	V _F	0.55			0.70		0.85		0.9		V		
Maximum DC reverse current at rated DC blocking voltage	I _R	0.3					0.2		0.1		mA		
T _A =25℃ T _A =100℃		10.0					5.0		2.0				
Typical junction capacitance (NOTE 1)	C _J	110			80						pF		
Typical thermal resistance (NOTE 2)	R _{θJA}	90.0									℃/W		
Operating junction temperature range	T _J	-55 to +150									℃		
Storage temperature range	T _{STG}	-55 to +150									℃		

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. P.C.B. mounted with 2.0"x2.0" (5.0x5.0cm) copper pad areas



SS12 THRU SS1200

Reverse Voltage - 20 to 200 Volts Forward Current - 1.0 Ampere

Typical Characteristics

Fig.1 Forward Current Derating Curve

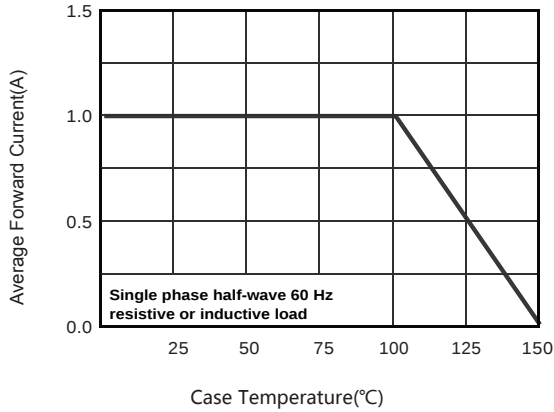


Fig.2 Typical Reverse Characteristics

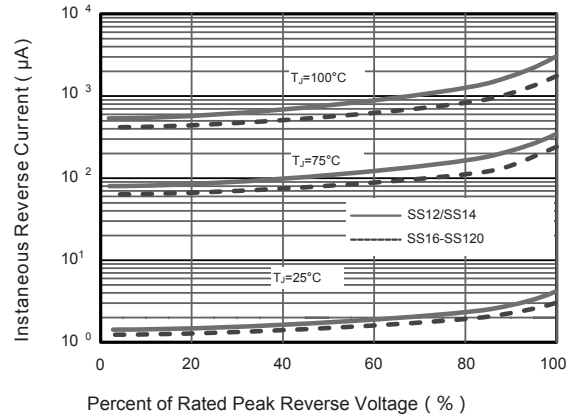


Fig.3 Typical Forward Characteristic

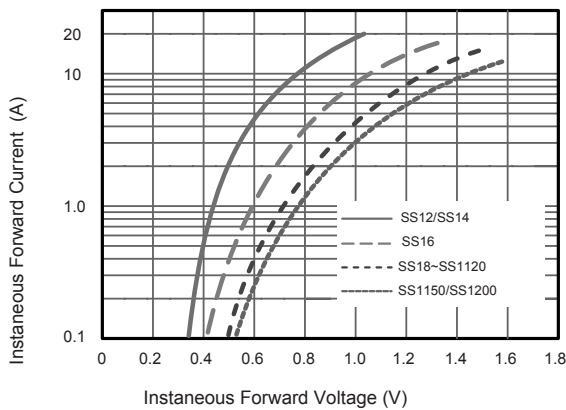


Fig.4 Typical Junction Capacitance

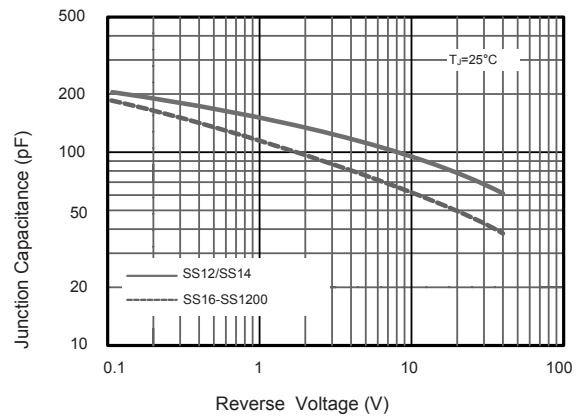


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


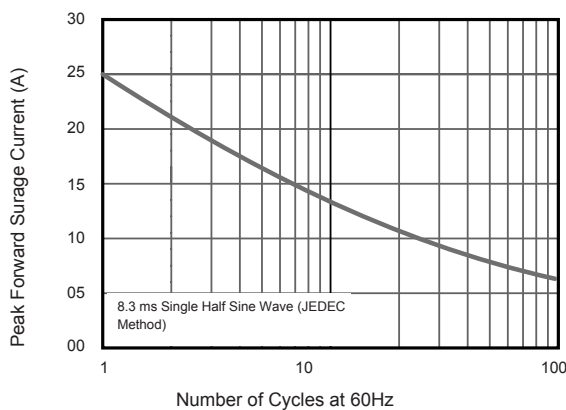


Fig.6- Typical Transient Thermal Impedance




The curve above is for reference only.

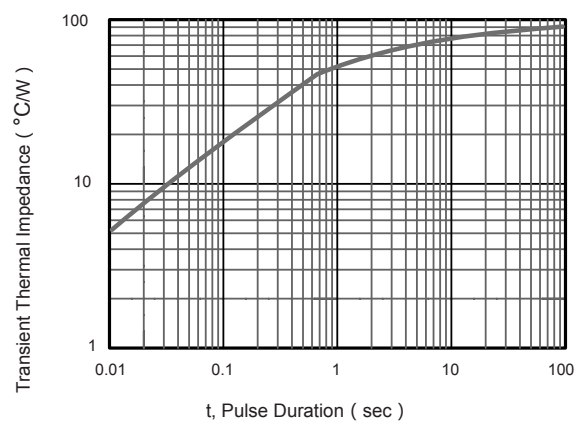

SS12 THRU SS1200

Reverse Voltage - 20 to 200 Volts Forward Current - 1.0 Ampere

Packing information

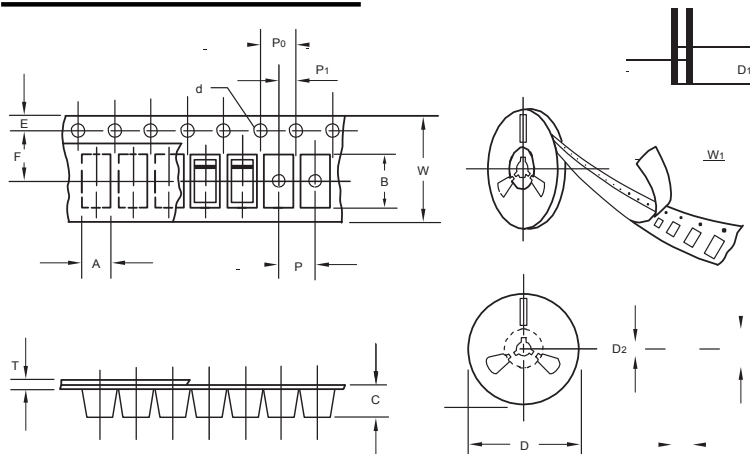

unit:mm


Item	Symbol	Tolerance	SMA
Carrier width	A	0.1	2.80
Carrier length	B	0.1	5.33
Carrier depth	C	0.1	2.36
Sprocket hole	d	0.05	1.50
13" Reel outside diameter	D	2.0	330.00
13" Reel inner diameter	D1	min	50.00
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	5.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.28
Tape width	W	0.3	12.00
Reel width	W1	1.0	18.00

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SMA	7"	2,000	4.0	4,000	183*155*183	178	382*356*392	80,000	16.0
SMA	11"	5,000	4.0	10,000	290*290*38	330	310*310*360	80,000	11.0
SMA	13"	7,500	4.0	15,000	335*335*38	330	350*330*360	120,000	14.5

Suggested Pad Layout

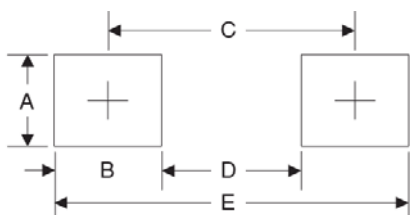

Symbol	Unit (mm)	Unit (inch)
A	1.68	0.066
B	1.52	0.060
C	3.90	0.154
D	2.41	0.095
E	5.45	0.215